




## BRIEF INFORMATION

Rallye 3003 auxiliary spotlight –  
with position light, Ref. 50



Upright mounting.  
Inclination angle  $-45^{\circ}$  to  $+90^{\circ}$

### DELIVERY SCOPE

- Halogen spotlight incl. position light socket and alternative blind plug
- Attachment material
- Mounting instructions

### PRODUCT CHARACTERISTICS

- The ideal supplement for better light performance for trucks, off-road vehicles and SUVs.
- High-boost reflector 10 plus: supplies more than 10% extra illumination power thanks to a newly developed reflector – compared to the Rallye 3003 with Ref. 37.5
- Impact resistant and sturdy casing
- Flexible holder system
- ECE type tested (E)
- Suitable for H1 12 V/55 W or H1/24 V/70 W high beam with position light and W5W/12 V/5 W or W5W/24 V/5 W
- Clear real-glass lens
- $\varnothing$  22 cm
- Weight: 1,350 g

### ACCESSORIES

Protective cap\*

**8XS 168 664-001**

\* Protective caps are not legally authorised in some countries. Before use on public roads, please check with your competent government agency.

# RANGE OVERVIEW



## Rallye 3003 – with silver-coloured design ring

Spotlight (ECE Ref. 50), 12 V or 24 V

1F8 009 797-321



## Rallye 3003 – with chrome design ring

Spotlight (ECE Ref. 50), 12 V or 24 V

1F8 009 797-341



## Rallye 3003 Blue – with silver-coloured design ring

Clear blue real glass lens

Spotlight (ECE Ref. 50), 12 V or 24 V

1F8 009 797-331



## Rallye 3003 Blue – with chrome design ring


Clear blue real glass lens

Spotlight (ECE Ref. 50), 12 V or 24 V


1F8 009 797-351

# LIGHT DISTRIBUTION COMPARISON

Rallye 3003  
Reference number  
37.5

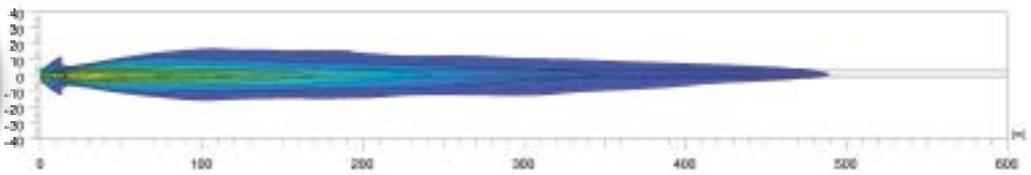

Rallye 3003  
Reference number  
50

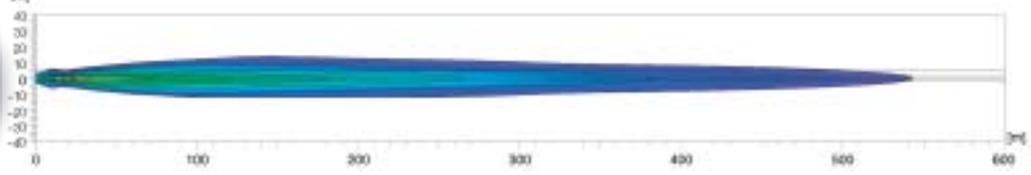

High-boost reflector plus 10

### Lux is a unit used to measure light.

It provides the luminous flux which hits a certain surface from the light source. For example; an office should be illuminated with at least 500 Lux and the human eye can still read a newspaper without any problems at 1 Lux. The values under the Lux axis show where the respective illumination intensity is achieved in the light distribution diagrams.

### Ref. 50, 40, 37.5, 17.5 and 12.5:

The reference number (Ref.) is a value which refers to the spotlight. According to the ECE regulation; the reference number may not exceed an upper limit of 100 per vehicle. The two values of the standard high beams (left and right main headlights) plus the value of other mounted spotlights are added. The value is entered on the cover lens of approved headlights.



### Experience light.

Auxiliary headlights from HELLA. The right light for every application. Test online now!

[www.hella.com/lightshow](http://www.hella.com/lightshow)

[www.hella.com/truck](http://www.hella.com/truck)

[www.hella.com/offroad](http://www.hella.com/offroad)

[www.hella.com/eliver](http://www.hella.com/eliver)