


Uni Vesa beslag – anodiseret

Standard Vesa skærm-beslag i solidt anodiseret aluminium. Kan f.eks. monteres direkte på profil, på beslag, dreje-arm.

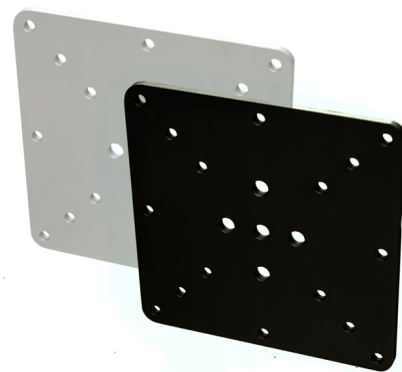

Standard Vesa skærm-beslag i solidt anodiseret aluminium. Kan f.eks. monteres direkte på profil, på beslag, dreje-arm. Der skal benyttes M4 bolte til monteringen af pladen på skærmen, evt. også skiver, afstandsstykker eller møtrikker.

Pladen har hul-afstandene 50, 75 og 100mm til skærmens beslag, samt 8 monteringshuller.

matronics

Køb online på www.matronics.dk/A000100

Produktoversigt

Sølv



Varenr. A000100
Dimensioner: 114 x 114mm

Sort



Varenr. A000101

Technical drawing of a rectangular plate with dimensions and hole specifications. The plate has a width of 114 and a height of 114. The dimensions are indicated by blue arrows and labels: 114 (width), 114 (height), 100 (distance from top edge to center of first row of holes), 75 (distance from top edge to center of second row of holes), and 50 (distance from top edge to center of third row of holes). The plate features a 3x5 grid of holes. The holes are specified by their diameters: $\phi 4,40$ (smaller holes) and $\phi 6,40$ (larger holes). The drawing includes a side view of the plate, showing its thickness of 4 units.